


# Subminiature PCB Telecom Relay With Bifurcated Contacts **PC323**



### FEATURES

- Subminiature design
- DIL Package for PC board or socket
- Contact capacity from 1 mA to 2 A
- Meets FCC part 68 voltage surge
- Class "B" insulation standard
- Three coil sensitivities available
- Bifurcated crossbar contacts
- Sealed Immersion Cleanable

File # E86876

### CONTACT DATA

<b>Material</b>	AgNi + Au (Silver Nickle + Gold Clad) AgPd + Au (Silver Palladium + Gold Clad)	
<b>Initial Contact Resistance</b>	50 mOhm max @ 1mA, 20mV, 1KHz, meets DIN 4160 part 4	
<b>Service Life</b>	<b>Electrical</b>	1 X 10 <sup>5</sup> Operations
	<b>Mechanical</b>	1 X 10 <sup>8</sup> Operations

### CONTACT RATINGS

<b>Contact Form</b>	2 Form C DPDT (crossbar contacts)
<b>Switching Current Range</b>	1 mA to 2 A
<b>Switching Voltage Range</b>	10 mVAC - 250VAC; 10 mVDC - 220 VDC
<b>Max. Continuous Current</b>	2 Amps
<b>Switching Power Range</b>	10 micro W to 30 W / 62.5 VA
<b>UL Rated Loads</b>	1A / 24 VDC 0.5A / 125 VAC

### COIL DATA

Type	Coil Voltage	Resistance Ohms ± 10%	Must Operate Voltage Max. (VDC)	Allowable Operating Voltage Range	Hold Voltage	Must Release Voltage
<b>Standard 0.45 W</b>	3	20	2.1	2.1 - 7.0	1.0	0.3
	5	56	3.3	3.3 - 7.7	1.25	0.5
	6	80	4.0	4.0 - 9.2	1.5	0.6
	12	320	8.0	8.0 - 18.3	3	1.2
	24	1280	15.9	15.9 - 36.7	6	2.4
<b>H* Sensitive 0.2 W</b>	5	125	3.5	3.5 - 10.8	1.25	0.5
	6	180	4.2	4.2 - 13.0	1.5	0.6
	9	405	6.3	6.3 - 19.5	6.75	0.9
	12	720	8.4	8.4 - 26.5	9	1.2
	24	2880	16.8	16.8 - 52.9	18	2.4
<b>L Sensitive 0.15 W</b>	48*	7680*	33.6	33.6 - 103.9	38	4.8
	3	60	2.1	2.1 - 7.5	1.125	0.15
	5	167	3.5	3.5 - 12.5	1.25	0.25
	6	240	4.2	4.2 - 15.0	1.5	0.3
	12	960	8.4	8.4 - 30.0	3	0.6
	24	3840	16.8	16.8 - 52.9	6	2.4


### ORDERING INFORMATION

Example:	PC323	-12	P	H	-X
Model					
Coil Voltage					
Contact Material					
Nil: AgNi + Au; P: AgPd + Au					
Sensitivity					
Nil: Standard .450 W; H: 0.2 W; L: 0.15 W					
RoHS Compliant					
Nil: Not Rohs, -X: RoHS Compliant					

**CHARACTERISTICS**

Type	Standard	Sensitive H & L
Operate Time	5 ms. max.	5 ms. max.
Operate Bounce	1 ms. typical	0.5 ms. typical
Release Time	3 ms. max.	5 ms. max.
Release Bounce	2.5 ms. typical	3 ms. typical
Insulation Resistance	1000 Megohms min. at 500 VDC, 50% RH	
Dielectric Strength	1500 V rms, 1 min. between coil and contacts and between adjacent parts 1000 V rms, 1 min. between open contacts	
Surge Strength	1500 V, between coil and contacts (FCC Part 68)	
Capacitance	0.7 pf max. between contacts; 0.9 pf max. between adjacent poles; 1.0 pf max. between coil and contacts	
Shock Resistance	50 g, 11 ms.	
Vibration Resistance	10 g, 10 - 70 Hz	
Allowable Max. Power Consumption at 20 C	1.02 W	
Ambient Temperature	-40 degrees C to 90 degrees C (-40 degrees C to 80 degreeec C for 0.3 w coil)	
Power Consumption	0.45 W	0.15 to 0.3 W
Weight	4.5 grams approx.	

**Dimensions in Inches (millimeters)  
Drawings are 2X actual size**

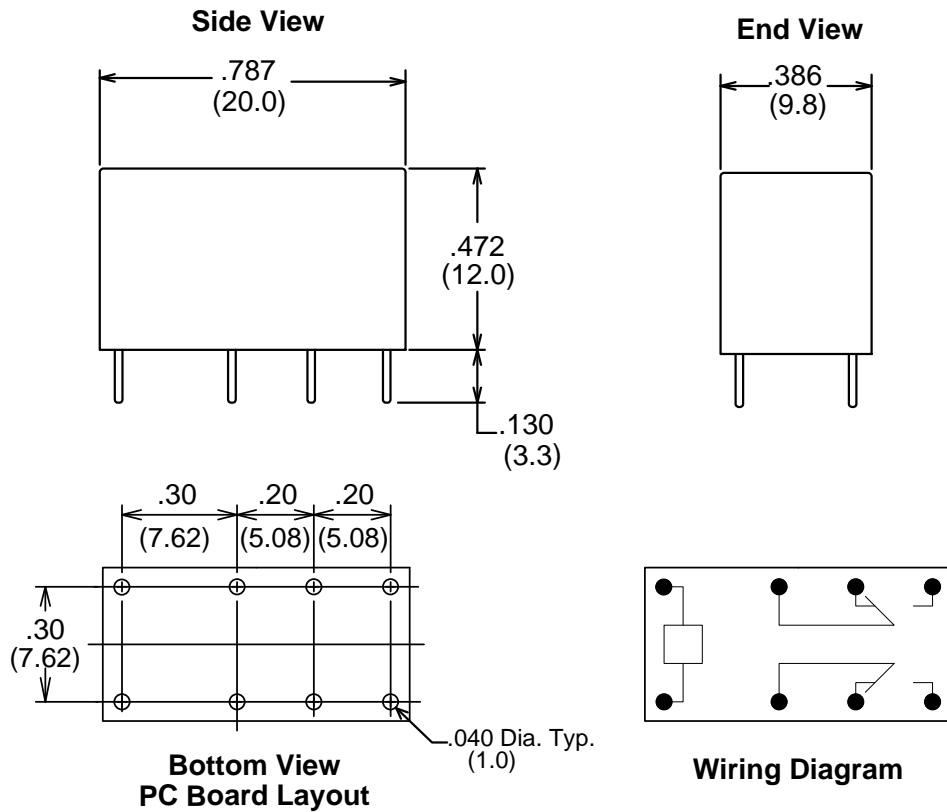

Notes:

Tolerances  $\pm$  .010 unless otherwise noted



3220 Commander Drive, Suite 102, Carrollton, Texas 75006

Sales: Call Toll Free (888) 997-3933 Fax (818) 342-5296 email: pickerwest@sbcglobal.net URL: pickercomponents.com